



TELECOM OPTICAL COMPONENTS

Built for Reliable Connectivity and
Network Deployment



Your **Trusted Partner** in Telecom Optical Components



Telecommunications



Smart Cities &
Urban Infrastructure



IT & Data Centers



Automation & Mobility



Real Estate &
Construction



Oil & Gas



Transportation
& Railways



Hospitality & Healthcare



Government & Defence

Why Byteworx

Precision. Compatibility. Reliable Connectivity.

Precision-engineered telecom and underground infrastructure components, built for reliable performance, long-term durability, and accurate asset identification. Our range includes fiber optic connectors, adaptors, attenuators, cable & pipe locators, and underground route markers.

15+

YEARS IN THE INDUSTRY

500+

CLIENTS SERVED

100%

QUALITY COMMITMENT

6

STATES TESTED

Telecom **Optical** Components Categories



Optical
Connectors

RELIABLE CONNECTIVITY



Optical
Adaptors

WIDE COMPATIBILITY



3M Locators
& Markers

PRECISION TRACKING

Complete Product Solutions

Under One Roof

Our comprehensive portfolio covers essential connectivity and infrastructure solutions for modern telecom networks. From optical connectors and adaptors to locators and underground route markers, each product is designed for reliable performance.



Precision Engineered
Accurate alignment for reliable optical connectivity



Quality Assurance
Built for stable performance across demanding network environments.



Wide Compatibility
Available across widely used configurations.



Low Insertion Loss
Built for efficient signal transmission and consistent connectivity



Product Matrix


Optical Connectors	Page No.
LC Series	6–10
SC Series	11–13
FC Series	14–15
ST Series	16–17
Fast Field	18–19
MU/MTRJ Series	18–19
E2000/MPO Series	18–19
Optical Adaptors	
LC Series	20–25
SC Series	26–31
FC Series	32–33
ST Series	32–33
Hybrid Series	34–35
Optical Attenuators	36–37
E2000 Series	38–39
MTRJ Series	38–39
MU Series and MPO Series	40–41
3M™ Locators and Markers	
3M™ Dynatel™ Marker Locator 1420-ID	42–43
3M™ EMS & ID Ball Marker	42–43
3M™ EMS Full-Range Marker	45–45

LC Series

FIBER OPTIC CONNECTORS

LC SERIES CONNECTOR — EXPLODED VIEW

LC 0.9/2.0/3.0

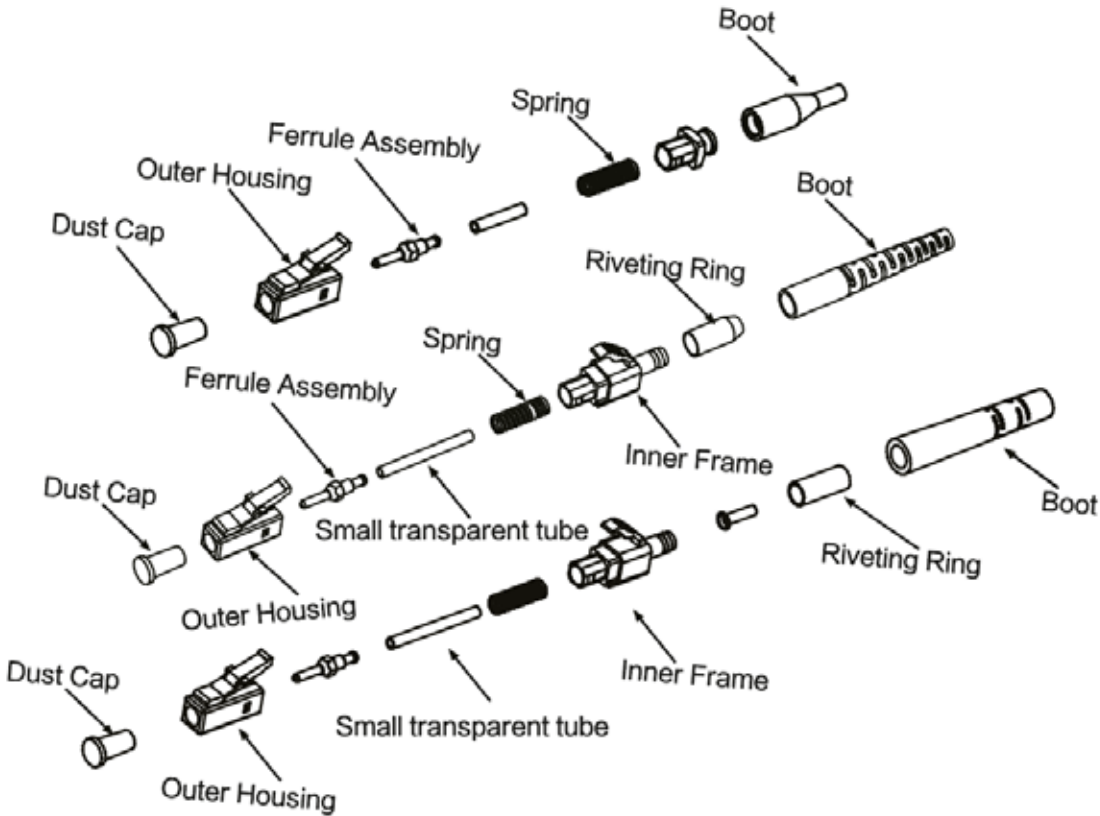

Performance Parameters

Items	Ferrules	Inner Diameter of Ferrules	Ferrule Concentricity	Insertion loss	Return Loss	Working & Storage Temperature
SM	UPC	125.3~126.3 μm	<1.0 μm <0.5 μm <0.3 μm	@1310/1550nm ≤0.2 dB	≥50 dB	-40~+85°C
	APC				≥60 dB	
MM	PC	125.5~126.5 μm	<4.0 μm	@850/1300nm ≤0.2 dB	≥30 dB	

LC Series Selection Options

Model	Color Of Housing	Color Of Boot	Color Of Duplex Clip(optional)	Fiber Cable	Ferrule
LC	LC/UPC (Blue)	LC/UPC (Blue)	LC/UPC (Blue)	Φ 0.9mm Φ 1.2mm Φ 2.0mm Φ 3.0mm	SM MM
	LC/APC (Green)	LC/APC (Green)	LC/APC (Green)		
	MM (Beige)	MM (Beige)	MM (Beige)		
	OM3 (Aqua)	OM3 (Aqua)	OM3 (Aqua)		
	OM4 (Violet)	OM4 (Violet)	OM4 (Violet)		
	OM5 (Lemon Green)	OM5 (Lemon Green)	OM5 (Lemon Green)		

Colours can be customised

Blue	Green	Beige	Aqua	Violet	Lemon Green
------	-------	-------	------	--------	-------------

Compact Design for
Space efficiency

Features

- Available in single-mode and multimode ferrule
- Single-mode available in UPC and APC ferrules
- Multimode available in PC ferrules
- SM ferrule inner diameter: 125.3 – 126.3μm
- MM ferrule inner diameter: 125.5 – 126.5μm
- SM UPC insertion loss: ≤0.2dB @1310/1550nm | Return loss: ≥50dB
- SM APC return loss: ≤0.2dB @1310/1550nm | Return Loss: ≥60dB
- MM PC insertion loss: ≤0.2dB @850/1300nm | Return loss: ≥30dB
- Working temperature: -40°C to +85°C
- Storage temperature: -40°C to +85°C
- Available connector formats: LC 0.9mm SX, LC 1.2mm SX, LC 2.0mm SX, LC 2.0mm DX, LC 3.0mm SX, LC 3.0mm DX, LC Uniboot, LC Uniboot 5.0mm, LC/DIN 0.9mm Square Hole, DIN 3.0mm SX

LC Series CONNECTORS



LC 0.9 mm SX
Connector



LC 1.2 mm SX
Connector



LC 2.0 mm SX
Connector



LC 2.0 mm SX
Connector



LC 3.0 mm SX
Connector



LC 2.0 mm DX
Connector



LC 3.0 mm DX
Connector



LC Uniboot
Connector



LC Uniboot
Connector

LC Series CONNECTORS



LC Uniboot
Connector



LC Uniboot
Connector



LC Uniboot 5.0 mm
Connector

LC/DIN Series



LC 0.9 mm Square Hole
Connector



DIN 3.0 mm SX
Connector

LC Connector Boot



LC 0.9 mm
Connector Boot



LC 2.0 mm
Connector Boot



LC Uniboot Type
Connector Boot



LC 3.0 mm
Connector Boot

LC Dust Cap/Ferrule



LC
Dust Cap



LC
Ferrule




LC
Ferrule

SC Series
FIBER OPTIC CONNECTORS

SC SERIES CONNECTOR — EXPLODED VIEW

SC 0.9
SC 2.0/3.0

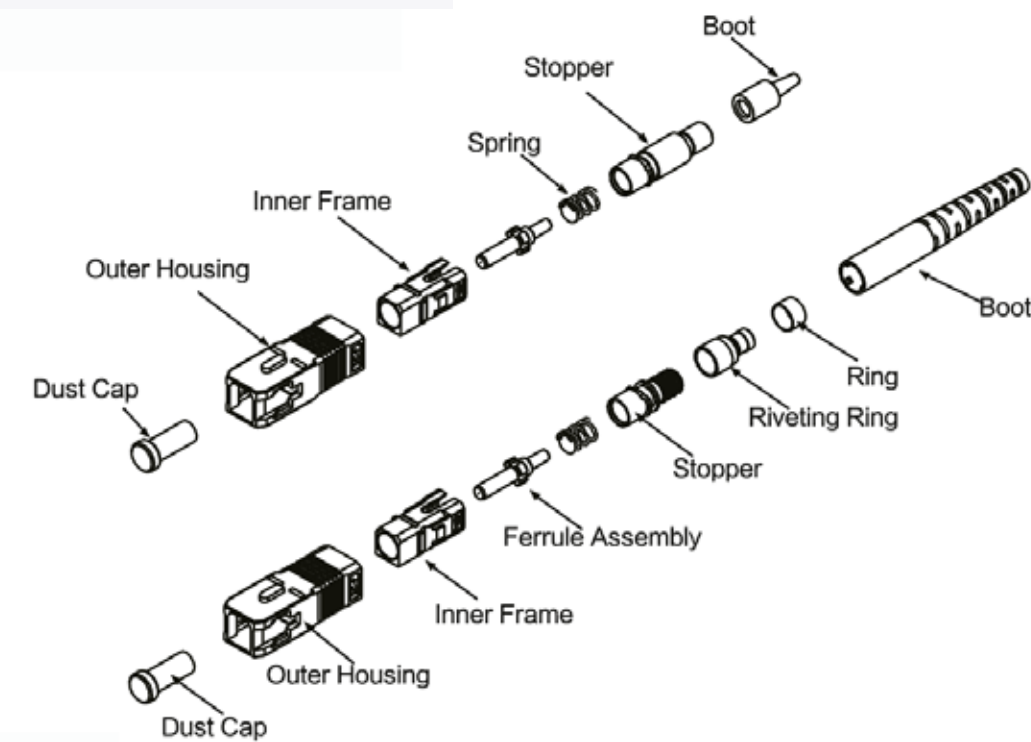

SC Series Selection Options

Model	Color Of Housing	Color Of Boot	Color Of Duplex Clip(optional)	Fiber Cable	Ferrule						
SC	SC/UPC (Blue)	SC/UPC (Blue)	SC/UPC (Blue)	Φ0.9mm	Ceramic SM UPC Ceramic SM APC Ceramic MM PC						
	SC/APC (Green)	SC/APC (Green)	SC/APC (Green)	Φ1.2mm							
	OM1/OM2 (Beige)	OM1/OM2 (Beige)	OM1/OM2 (Beige)	Φ2.0mm							
	OM3 (Aqua)	OM3 (Aqua)	OM3 (Aqua)	Φ3.0mm							
	OM4 (Violet)	OM4 (Violet)	OM4 (Violet)	Φ3.5mm							
	OM5 (Lemon Green)	OM5 (Lemon Green)	OM5 (Lemon Green)	Φ4.5mm							
Available in 12 Colours (can be customised)											
Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Violet	Pink	Aqua

SC Series CONNECTOR



SC 0.9 mm
Connector



SC 1.2 mm
Connector



SC 2.0/3.0 mm
Connector



SC/UPC 2.0/3.0 mm DX
Connector



SC APC Flat Drop Cable
Connector



SC Uniboot 3.0 mm
Connector



Push Pull SC
Connector


SC Connector Boot




SC 0.9 mm
Connector Boot



1.2 mm Universal Tail
Sleeve Connector Boot

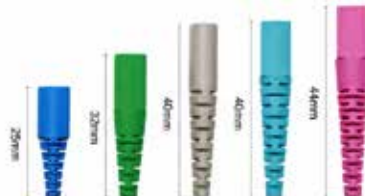

SC 2.0 mm Boot
Connector Boot

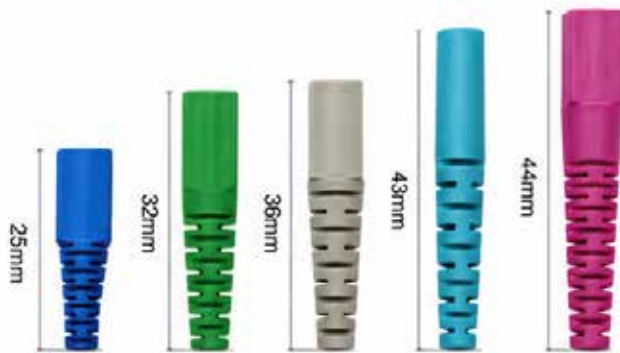

SC 3.0 mm Boot
Connector Boot

SC Dust Cap/Ferrule



SC
Dust Cap



UPC
Ferrule




APC
Ferrule

FC Series

FIBER OPTIC CONNECTORS

FC SERIES CONNECTOR — EXPLODED VIEW

SC 0.9
SC 2.0/3.0

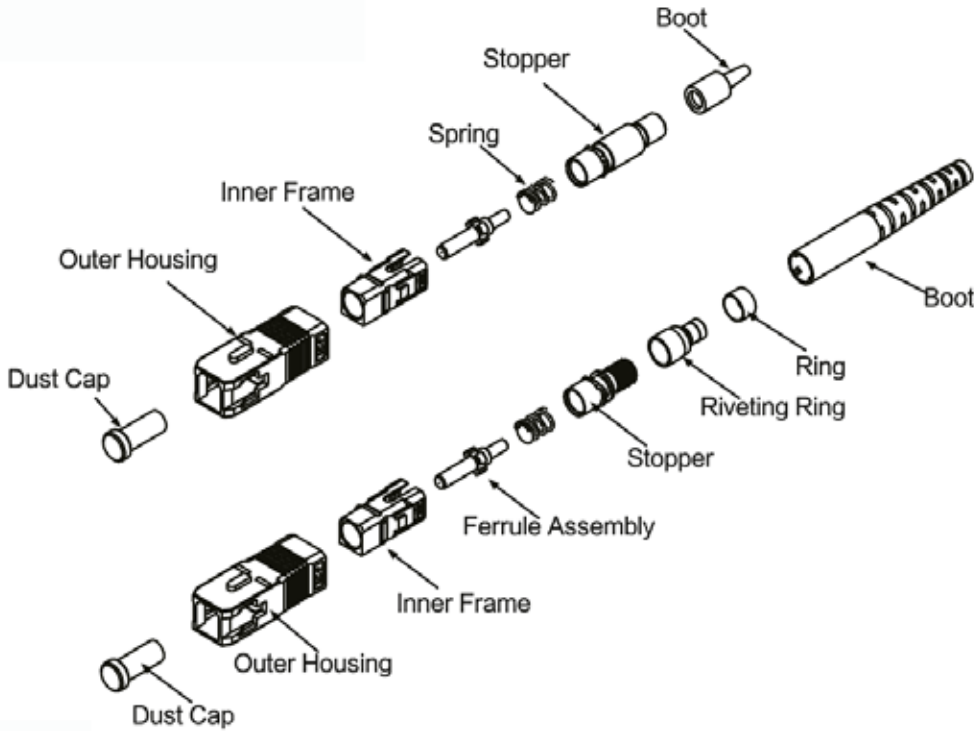

FC Series Selection Options

Model	Color Of Boot	Fiber Cable	Ferrule								
FC	SM/UPC (Blue)	Φ 0.9mm Φ 2.0mm Φ 3.0mm	Ceramic SM UPC Ceramic SM APC Ceramic MM PC								
	SM/APC (Green)										
	MM (Beige)										
	OM3 (Aqua)										
	OM4 (Violet)										
Available in 12 Colours (can be customised)											
Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Violet	Pink	Aqua

FC Connectors



FC 0.9 mm
Connector Boot



FC 0.9 mm
Connector Open view




Colour



FC 2.0/3.0 mm
Connector



FC 2.0/3.0 mm
Connector Open View

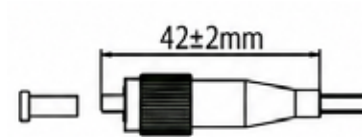


Colour



FC Connector Boot



FC 2.0 mm
Connector Boot




FC 3.0 mm
Connector Boot

ST Series

FIBER OPTIC CONNECTORS

ST SERIES CONNECTOR — EXPLODED VIEW

ST 0.9/2.0/3.0

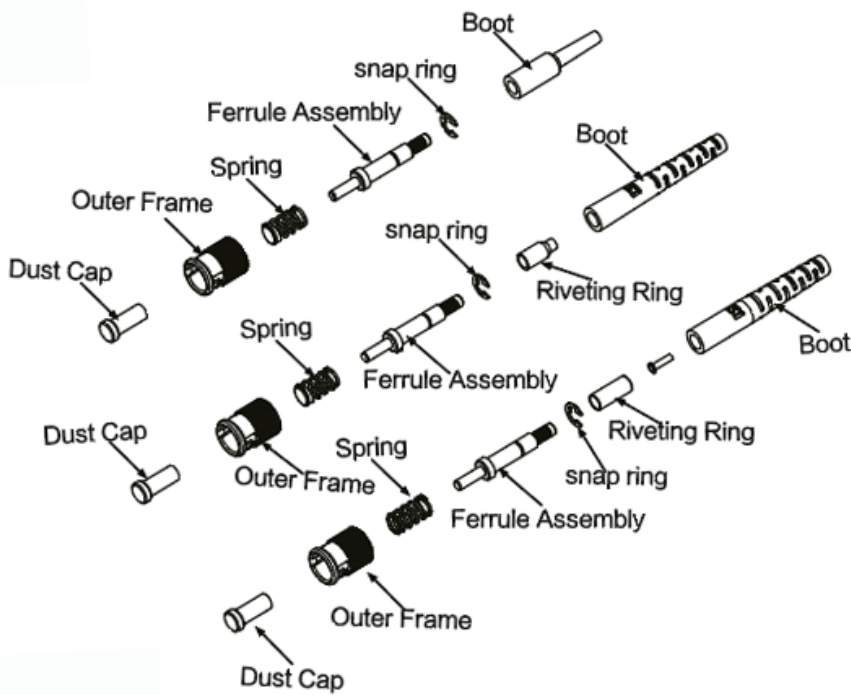

ST Series Selection Options

Model	Color Of Boot	Fiber Cable	Ferrule								
ST	SM/UPC (Blue)	Ø0.9mm Ø2.0mm Ø3.0mm	Ceramic SM UPC Ceramic SM APC Ceramic MM PC								
	SM/APC (Green)										
	MM (Beige)										
	OM3 (Aqua)										
	OM4 (Violet)										
Available in 12 Colours (can be customised)											
Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Violet	Pink	Aqua


ST Connectors



ST 0.9 mm
Connector



ST 0.9 mm
Connector Open view




Colour



ST 2.0/3.0 mm
Connector




ST 2.0/3.0 mm
Connector Open View




Colour



ST Connector Boot



ST 0.9 mm
Connector Boot



ST 2.0 mm
Connector Boot



ST 3.0 mm
Connector Boot

Fast Field CONNECTORS



SC Fast Connector



LC Fast Connector



LC Fast Connector



SC Fast Connector



SC Fast Connector



SC Fast Connector



SC Fast Connector



SC Fast Connector



SC Fast Connector



SC Fast Connector



SC Fast Connector



SC Fast Connector



SC Fast Connector



FC Fast Connector



FC Fast Connector

MU/MTRJ Series CONNECTORS



MU 0.9 mm Connector



MU 2.0 mm Connector



MTRJ Connector

E2000/MPO Series CONNECTORS



E2000 0.9 mm Connector



E2000 2.0/3.0 mm Connector



MPO Connector



MPO Connector

Optical Adaptors



Performance Parameters

Parameter	Singlemode (SM)			Multimode (MM)
	PC	UPC	APC	PC
Insertion loss	≤ 0.2dB	≤ 0.2dB	≤ 0.2dB	≤ 0.2dB
Alternating loss	≤ 0.2dB			
Repeatability	≤ 0.2dB			
Durability	The change of 1000 interpolation times is less than 0.20dB			
Working temperature	- 40°C ~ + 85°C			
Storage temperature	- 40°C ~ + 85°C			

LC Series


LC SERIES ADAPTORS



LC DX One-Piece Adaptor
With Flange



LC DX One-Piece Adaptor
Without Flange




LC DX One-Piece Adaptor
Without Flange



LC QUAD Welding Symmetry-Type
Adaptor Without Flange



LC QUAD SC-Type Welding
Adaptor With Flange




LC QUAD SC-Type Welding
Adaptor With Flange



LC QUAD One-Piece
Adaptor With Flange



LC QUAD One-Piece
Adaptor Without Flange




LC DX One-Piece Adaptor
Without Flange

LC Series


LC Series Adaptors



LC DX No Skylight
Adaptor



LC QUAD No Skylight
Adaptor




LC QUAD No Skylight
Adaptor



LC DX Metal
Adaptor



LC QUAD Metal
Adaptor




LC QUAD Metal
Adaptor



LC DX High-Low
Adaptor



LC DX High-High
Adaptor



LC DX High-Low
Adaptor

LC Series


LC Series Adaptors



LC SX SC Type Adaptor
With Flange



LC SX Adaptor
Without Flange




LC SX SC Type Adaptor
With Flange



LC DX Welding Symmetry-Type
Adaptor With Flange



LC DX SC-Type Welding
Adaptor With Flange




LC DX SC-Type Welding
Adaptor With Flange



LC DX Welding Symmetry-Type
Adaptor Without Flange



LC DX SC-Type Welding
Adaptor Without Flange



LC DX SC-Type Welding
Adaptor Without Flange

LC Series

LC Series Adaptors



LC Duplex Bow Back
Adaptor With Flange



LC DX Inner Shutter
Adaptor With Flange



LC QUAD Inner Shutter
Adaptor With Flange



LC DX One-Piece Metal
Adaptor




LC QUAD One-Piece Metal
Adaptor



LC DX Avoid Laser
Adaptor Without Flange



LC DX Avoid Laser
Adaptor Without Flange



LC DX Avoid Laser
Adaptor Without Flange

LC Series


LC Series Adaptors



LC QUAD Avoid Laser
Adaptor Without Flange



LC QUAD Avoid Laser
Adaptor Without Flange

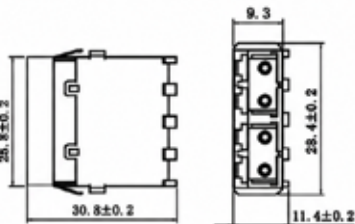

LC QUAD Avoid Laser
Adaptor With Flange



SC Series


SC Series Adaptors



SC Front Shutter Avoid Laser
Adaptor With Flange



SC Front Shutter Avoid Laser
Adaptor With Flange




SC Front Shutter Avoid Laser
Adaptor With Flange



SC Front Shutter Avoid Laser
Adaptor Without Flange



SC Front Shutter Avoid Laser
Adaptor Without Flange




SC Front Shutter Avoid Laser
Adaptor Without Flange



SC Cover Avoid Laser
Adaptor Without Flange



SC Cover Avoid Laser
Adaptor Without Flange



SC Cover Avoid Laser
Adaptor Without Flange

SC Series


SC Series Adaptors



SC Side Shutter Avoid Laser
Adaptor Without Flange



SC Side Shutter Avoid Laser
Adaptor Without Flange




SC Side Shutter Avoid Laser
Adaptor Without Flange



SC SX Metal Avoid Laser
Adaptor With Flange



SC SX Metal Avoid Laser
Adaptor With Flange

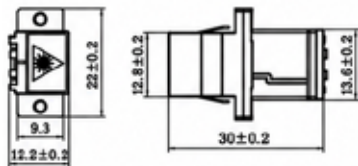

SC SX Metal Avoid Laser
Adaptor With Flange



SC Inner Shutter Adaptor
With Flange



SC Inner Shutter Adaptor
With Flange



SC Inner Shutter Adaptor
With Flange

SC Series


SC Series Adaptors



SC SX Welding Adaptor
With Flange



SC SX Welding Adaptor
With Flange



SC SX Welding Adaptor
With Flange



SC SX Welding Adaptor
Without Flange



SC SX Welding Adaptor
Without Flange




SC SX Welding Adaptor
Without Flange



SC SX One-Piece Adaptor
With Flange



SC SX One-Piece Adaptor
Without Flange



SC SX One-Piece Adaptor
Without Flange & With Flange

SC Series


SC Series Adaptors



SC DX One-Piece Adaptor
Without Flange



SC DX One-Piece Adaptor
Without Flange




SC DX One-Piece Adaptor
Without Flange



SC Adaptor
With Legs



SC Shrapnel
Adaptor




SC Adaptor
With Legs



SC SX Metal
Adaptor



SC DX Metal
Adaptor




SC DX Metal
Adaptor

SC Series

SC Series Adaptors



SC SX Simple
Adaptor



SC 12 Core
Adaptor



SC Metal Internal Flip
Adaptor



SC SX Anti-dislodging
Adaptor



SC Side Strap Foot
Adaptor



SC Inward Flip Double Door
Adaptor



SC SX Adaptor
With Short Legs



SC SX Adaptor
With Legs Round



SC SX Adaptor
With Legs

SC Series

SC Series Adaptors



SC Inner Shutter Adaptor
Without Flange



SC Inner Shutter Adaptor
Without Flange




SC Inner Shutter Adaptor
Without Flange



SC DX Metal Avoid Laser
Adaptor With Flange



SC DX Metal Avoid Laser
Adaptor With Flange



SC DX Metal Avoid Laser
Adaptor With Flange

FC Series


FC Series Adaptors



FC SX Big D-Type Adaptor



FC SX Small D-Type Adaptor




FC SX Small D-Type Adaptor



FC SX Adaptor With Rectangle Flange



FC DX Adaptor With Rectangle Flange




FC SX Adaptor With Rectangle Flange



FC Adaptor With Square Flange



FC Adaptor With Rectangle Flange



FC Adaptor With Rectangle Flange

ST Series


ST Series Adaptors



ST SX Metal Adaptor With Rectangle Flange




ST DX Metal Adaptor With Rectangle Flange




ST DX Metal Adaptor With Rectangle Flange



ST Series Adaptor



ST Series Adaptor

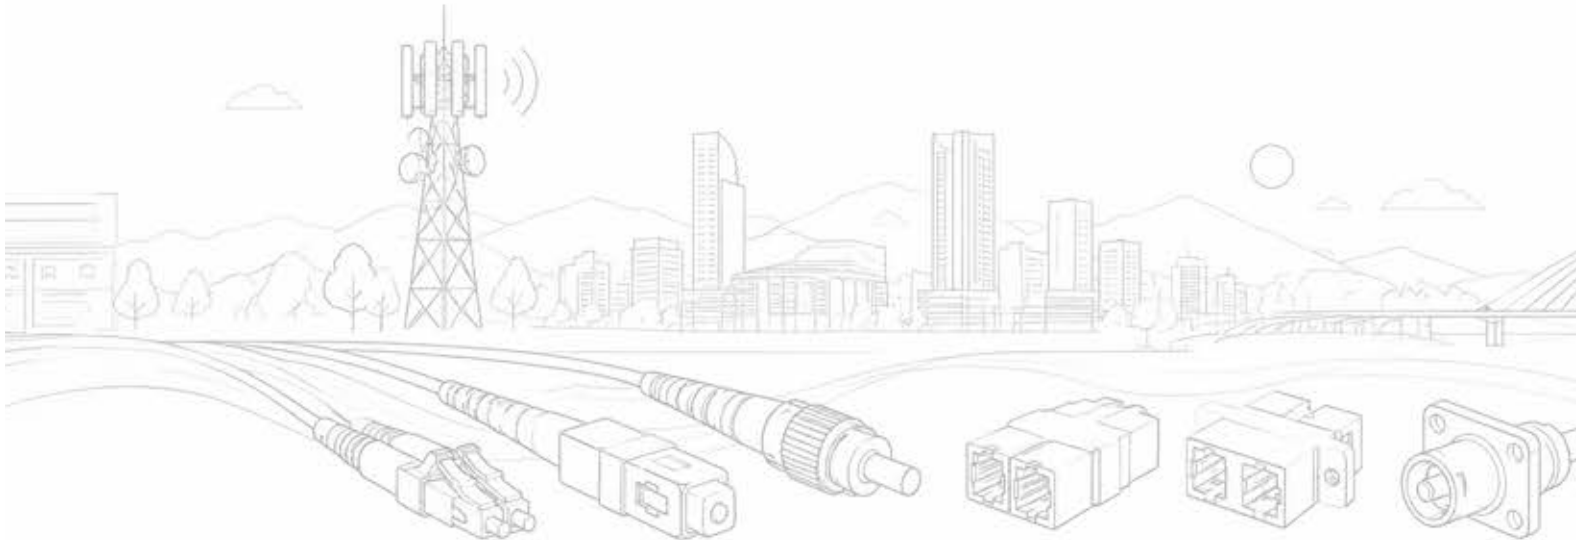

Hybrid Series


Hybrid Series Adaptors



SC-FC SX
Hybrid Adaptor



SC-FC DX
Hybrid Adaptor




SC-FC SX
Hybrid Adaptor



FC-ST SX
Hybrid Adaptor



FC-ST DX
Hybrid Adaptor




FC-ST SX
Hybrid Adaptor



SC-LC SX
Hybrid Adaptor



SC-LC DX
Hybrid Adaptor



ST-LC SX
Hybrid Adaptor

Hybrid Series

Hybrid Series Adaptors



SC-ST SX
Hybrid Adaptor



SC-ST DX
Hybrid Adaptor



SC-ST SX
Hybrid Adaptor



FC UPC(Male)-LC UPC(Female)
Hybrid Adaptor



ST UPC(Male)-LC UPC(Female)
Hybrid Adaptor



SC UPC(Male)-LC UPC(Female)
Hybrid Adaptor



FC UPC(Male)-SC UPC(Female)
Hybrid Adaptor



LC UPC(Male)-SC UPC(Female)
Hybrid Adaptor



SC UPC(Male)-SC UPC(Female)
Hybrid Adaptor

Hybrid Series

Hybrid Series Adaptors



SC UPC (Male) to ST UPC (Female)
Hybrid Adaptor



FC UPC (Male) to ST UPC (Female)
Hybrid Adaptor



SC UPC (Male) to E2000 UPC (Female)
Hybrid Adaptor

Optical Attenuator

The Byteworx Optical Attenuator range provides precise signal power reduction in fiber optic networks — enabling accurate control of optical power levels across SC, LC, FC, and ST connector series. Available in fixed attenuation values engineered for single-mode fiber applications.

Parameter	Unit	Value
Operating Wavelength	nm	1310/1550±10
Tolerance for 1-5dB Attenuation	dB	±0.5
Tolerance for 6-30dB Attenuation	dB	±10
Return Loss	dB	-
Operating Temperature	°C	-40~+75
Polarization Dependent	dB	-
Mating Durability	cycle	>1000

ST Series Attenuators



ST Attenuator
3dB

Optical Attenuator Series

SC Series Attenuators



SC/APC Attenuator
2dB



SC/APC Attenuator
5dB



SC/APC Attenuator
10dB

LC Series Attenuators



LC/UPC Attenuator
3dB



LC/UPC Attenuator
5dB



LC/APC Attenuator
7dB

FC Series Attenuators



FC Attenuator
3dB



FC Attenuator
7dB



FC Attenuator
5dB

E2000 Series


E2000 Series Adaptors



SC DX Welding Adaptor
With Flange



SC DX Welding Adaptor
With Flange




SC DX Welding Adaptor
With Flange



SC DX Welding Adaptor
Without Flange



SC DX Welding Adaptor
Without Flange




SC DX Welding Adaptor
Without Flange



E2000
Adaptor



E2000
Adaptor



E2000
Adaptor

E2000 Series


E2000 Series Adaptors



E2000
Adaptor



E2000
Adaptor



E2000
Adaptor


MTRJ Series Adaptors



SC DX One-Piece Adaptor
With Flange



SC DX One-Piece Adaptor
With Flange




SC DX One-Piece Adaptor
With Flange



MTRJ
Adaptor



MTRJ
Adaptor



MTRJ
Adaptor

MU Series

MU Series Adaptors



MPO Series Adaptors



Application & Deployment

- ✓ FTTH / FTTx Networks
- ✓ Telecommunication & Broadband Networks
- ✓ Data Centres & Enterprise Networks
- ✓ Optical Distribution Frames (ODF) & Fibre Management Systems
- ✓ Central Offices & Network Hubs
- ✓ Outside Plant (OSP) & Fibre Distribution Points
- ✓ LAN, MAN & Access Networks
- ✓ CATV & Passive Optical Networks (PON)
- ✓ Fiber Testing, Measurement & Equipment Interconnection
- ✓ Road, Rail & Transportation Communication Networks
- ✓ Data-centre and Industrial Deployments
- ✓ Enterprise and campus fiber network terminations



3M™ Locators & Markers

Custom Wraps India supplies the complete 3M™ Electronic Marking System (EMS) — an industry-standard solution for locating and managing buried utility infrastructure. Combining passive underground markers with 3M Dynatel™ Locators, the system delivers accurate detection across utility types, soil conditions, and field environments.

3M™ Dynatel™ Marker Locator 1420-ID

The 3M Dynatel Marker Locator 1420-ID quickly and accurately locates underground markers, with simultaneous detection of two marker frequencies. Lightweight, GPS-enabled, and featuring a large backlit display, it delivers fast, precise EMS marker detection without cable or pipe tracing functions.

-  Detects industry-standard 3M EMS marker frequencies
-  Reads/writes 3M iD data with push-button depth estimation
-  Reads markers up to 8 ft (2.4 m) deep
-  Simultaneously locates two marker frequencies
-  Lightweight, balanced & ergonomic for extended use
-  GPS-enabled for GIS mapping of utilities and markers
-  Large backlit display for clear viewing in all conditions



3M™ EMS and iD Ball Marker

Self-levelling underground point marker — suited for depths of 5–6 ft.



Features

-  Self-levelling design for correct orientation after burial
-  Customisable data: Facility, material, application & placement date
-  Data accessible via 3M Dynatel iD locators or GIS systems
-  Unique frequencies for clear utility identification
-  APWA colour-coded for easy identification
-  Burial depth: 5–6 ft | Read range: Up to 6 ft
-  Passive & maintenance-free — no batteries required
-  Works in all soil conditions, including asphalt, cement, wet & dry soil
-  iD read range: Up to 5 ft

Specifications

Parameter	Details
3M EMS Ball Marker (EMS, 6 ft)	Telephone 1401-XR Power 1402-XR CATV 1407-XR General 1408-XR Water 1403-XR Wastewater 1404-XR Gas 1405-XR
3M iD Ball Marker (iD, 5 ft)	Telephone 1421-XR/iD Power 1422-XR/iD CATV 1427-XR/iD General 1428-XR/iD Water 1423-XR/iD Wastewater 1424-XR/iD Gas 1425-XR/iD
Burial Depth	5 to 6 feet (approximate)

3M™ EMS Full-Range Marker

Deep-burial underground point marker — detection up to 9 ft.



Features


-  Suited for deep applications of up to 8–9 feet
-  Maximum detection read range: up to 9 ft
-  Operates in all soil types — under asphalt, cement, and wet or dry soil
-  Completely passive — no batteries, no maintenance, no wiring required
-  Unique frequency per utility type for unambiguous identification

-  Colour-coded to APWA standards — available in orange for Gas
-  Compatible with GIS system upload & RFID option available
-  3M iD Full-Range Marker iD read range: up to 8 ft
-  iD customisable with: Facility data, Material type and size, Type of application, Placement date
-  Field-accessible through any 3M Dynatel iD-capable locator

Application & Deployment

- ☒ Marks deeply buried gas, power, telecom, water & wastewater lines beyond standard marker depth.
- ☒ Deep-trench installations in urban, highway & infrastructure projects.
- ☒ Long-term underground utility marking with extended service life.
- ☒ Pre-excavation safety compliance on deep utility corridors
- ☒ GIS asset data retrieval & management for deep networks via iD.
- ☒ Installations for sites with future deep excavation needs.
- ☒ Marks buried telecom, power, gas, water & wastewater lines at mid-to-deep depths.
- ☒ Identifying route changes, junctions, and points of interest on buried utility
- ☒ Pre-excavation utility identification for safe digging compliance
- ☒ GIS asset data collection and management via iD marker capability
- ☒ Use in environments where a stable, self-levelling marker form is required
- ☒ Maintenance inspection of buried infrastructure networks
- ☒ Field access to iD marker data — facility records, material type, installation date
- ☒ Verification of marker placement after installation
- ☒ Use in environments where a stable, self-levelling marker form is required
- ☒ Maintenance inspection of buried infrastructure networks



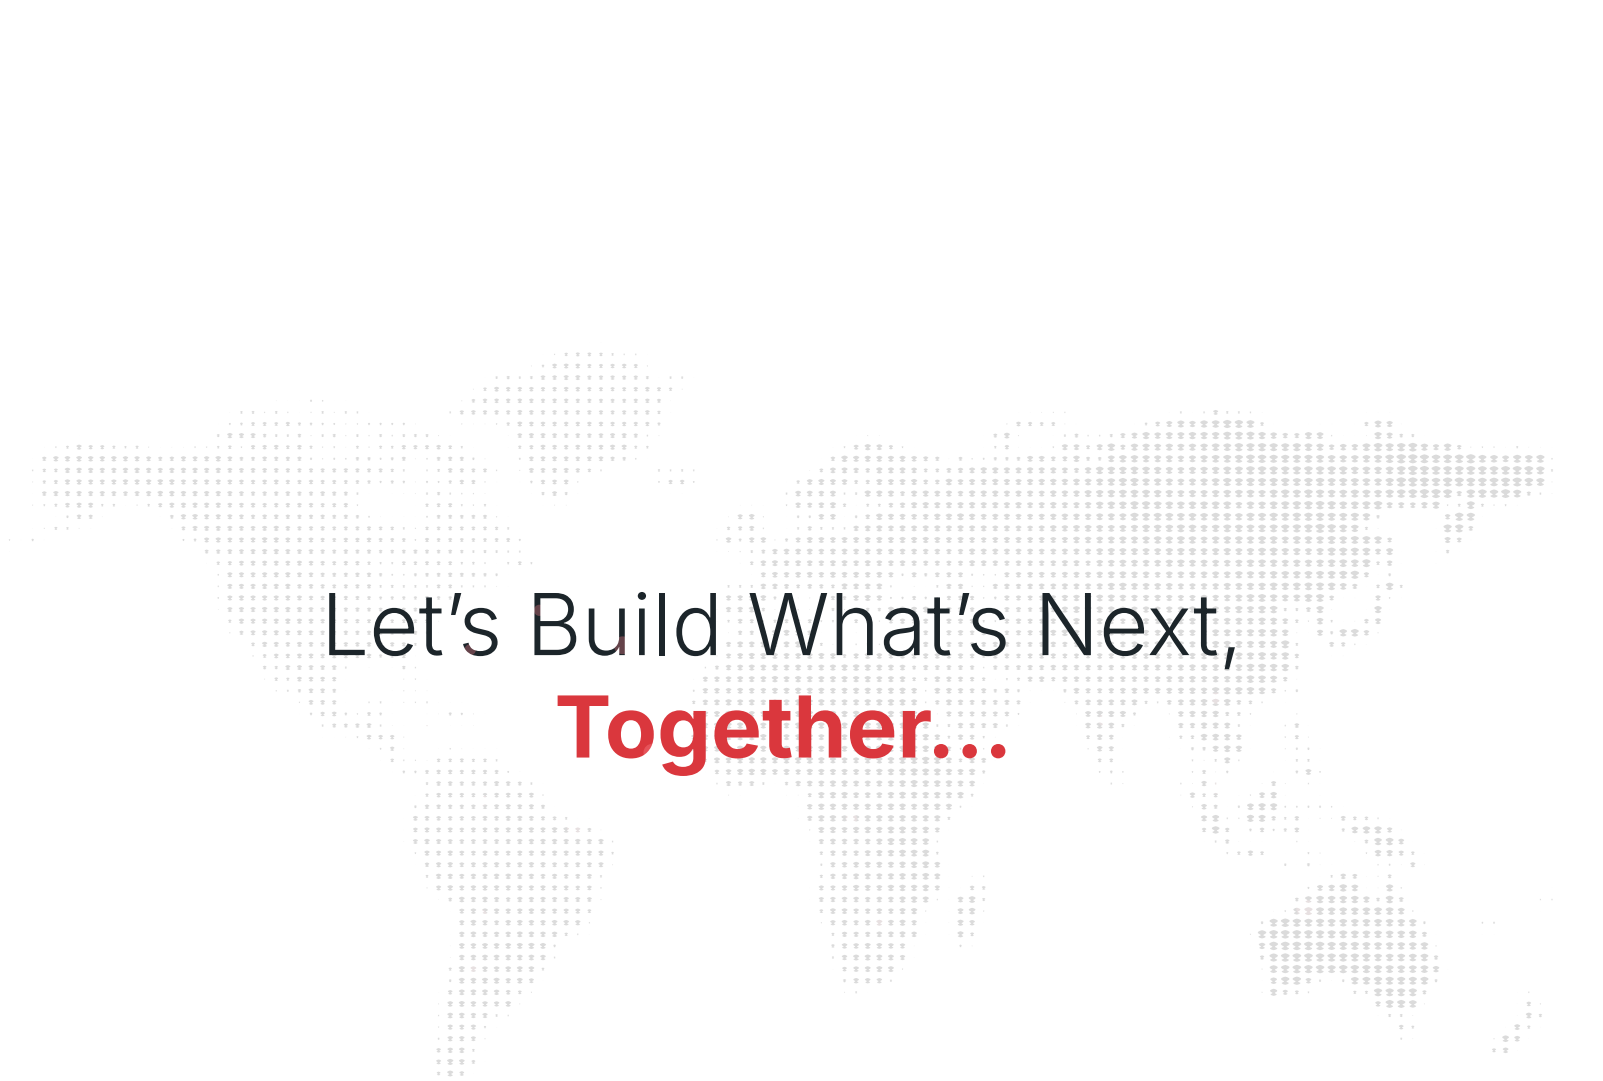

Let's Build What's Next,
Together...



BYTEWORX™
Connectivity, Simplified

— Registered Office

12/74, Pioneer Complex Site-IV, Industrial Area
Sahibabad, Ghaziabad, Uttar Pradesh - 201010

R&D Office: Bengaluru

Sales Offices: Gurugram, Jaipur

Manufacturing: Chennai, Bengaluru & Ahmedabad

GET IN TOUCH



0120 - 4129371
+91 98106 45757



info@customwrapsindia.com
Mail us for enquiries



www.customwrapsindia.com
Explore Products & Solutions